






REV	DESCRIPTION	DESIGN	DATE
A	NEW RELEASE	FangSongLe	2020/09/05

Specifications:
 Contact resistance: $\leq 30m\Omega$
 Insulation resistance: $\geq 1000M\Omega$
 Rated voltage: 200V AC DC
 Rated current: 1.0A AC DC
 Withstand Voltage: 1000V AC/minute
 Temperature Range: $-25^{\circ}C \sim +105^{\circ}C$
 Housing: LCP UL94V-0, BEIGE
 Contacts: Phosphor Bronze / MATTE Sn


ORDER INFORMATION:

B3002M-02-F2KB1-R

PART No.:	B3002M-02-F2KB1-R	PACKAGING:	R=REEL
No. OF CIRCUITS:	02	Metal code:	1=PhosphorBronze
PLASTIC MATERIAL:	F2K=LCP	PLATING:	B=MATTE Sn

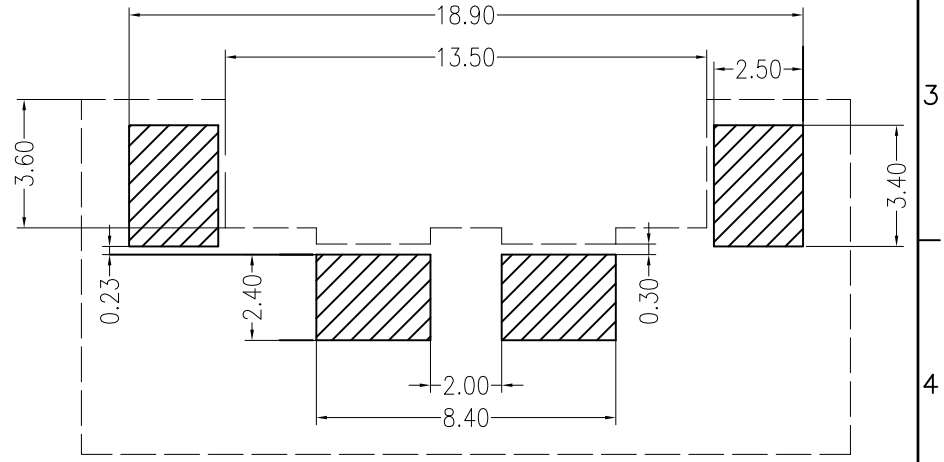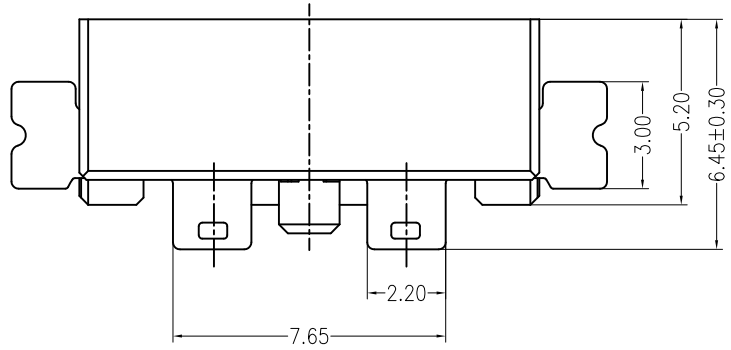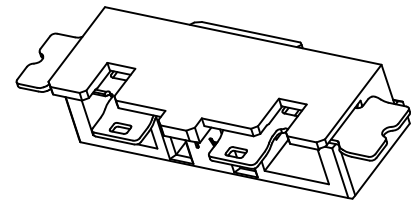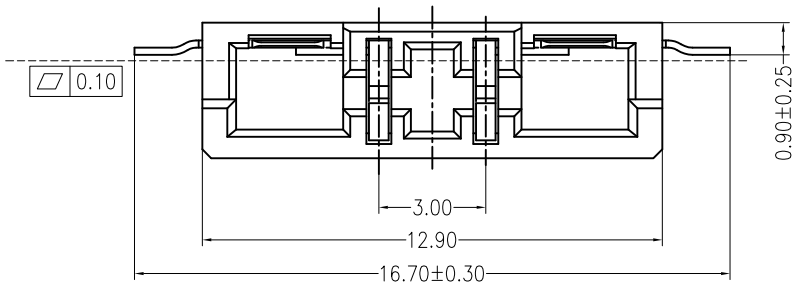

P. C. B LAYOUT

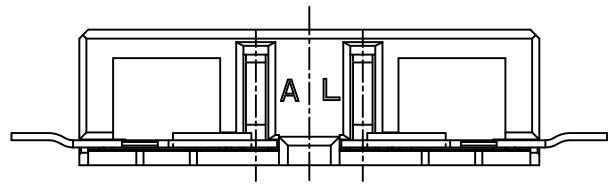

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.		TITLE: 3.0mm Pitch BTB SMT TYPE	
GENERAL TOLERANCE		USE:	CUSTOMER
X. ±0.50	X. ±5°	APPD:	WangFeng
X.X ±0.30	X.X ±2°	CHKD:	Steven
X.XX ±0.20	X.XX ±1°	DR:	FangSongLe
UNITS: mm		SCALE	1 : 1
		SHEET 1 / 1	