

A

B



C

D




E

F

REV	DESCRIPTION	DESIGN	DATE
A	NEW RELEASE	FangSongLe	2020/08/07

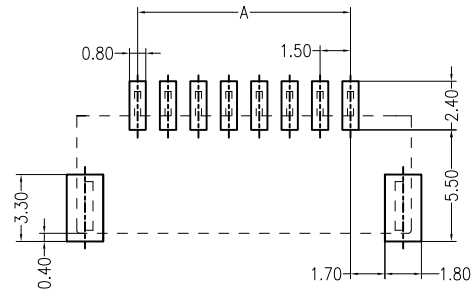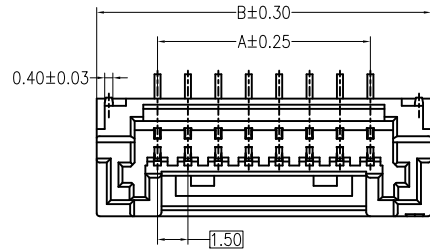

PCB LAYOUT(Tolerance:±0.05)

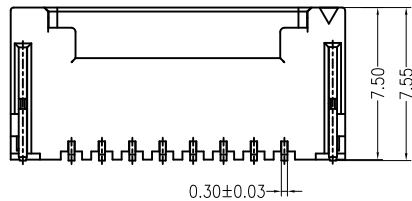
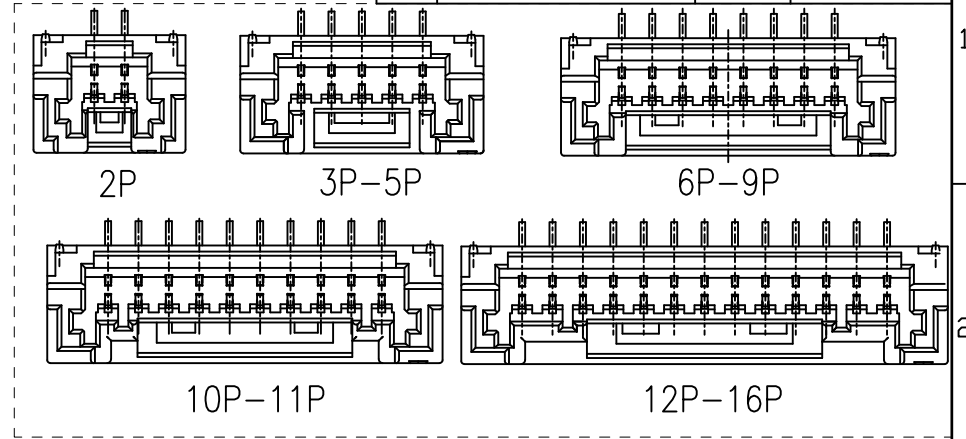


## Specifications:


Poles: 02 to 16  
 Contact resistance: ≤20mΩ  
 Insulation resistance: ≥500MΩ  
 Rated voltage: 100V AC DC  
 Rated current: 2.0A AC DC  
 Withstand Voltage: 500V AC/minute  
 Temperature Range: -25°C ~ +85°C  
 Housing: PA9T UL94V-0, Natural  
 Contacts: PhosphorBronze / Sn-plated  
 Solder tabs: Brass / Sn-plated

## ORDER INFORMATION:

<b>A1507AWV-**-D1MA1-R-M</b>			
PART No.	02-16P	PLASTIC MATERIAL: D1M=PA9T	M:MYRA PACKAGING: R=REEL Metal code: 1=PhosphorBronze PLATING: A= Sn

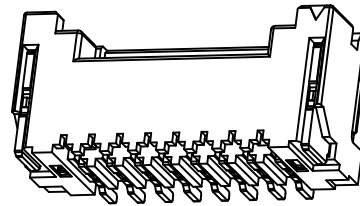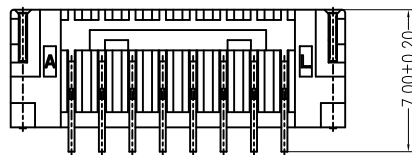

PIN.	DIM A	DIM B	PIN.	DIM A	DIM B
2pin	1.50	7.50	10pin	13.50	19.50
3pin	3.00	9.00	*11pin	15.00	21.00
4pin	4.50	10.50	*12pin	16.50	22.50
5pin	6.00	12.00	*13pin	18.00	24.00
6pin	7.50	13.50	*14pin	19.50	25.50
7pin	9.00	15.00	*15pin	21.00	27.00
8pin	10.50	16.50	*16pin	22.50	28.50
9pin	12.00	18.00			

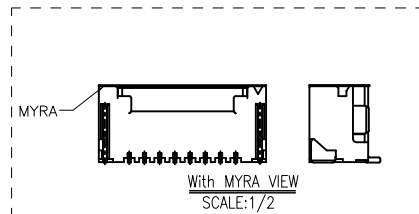

<b>JKUN</b> 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.		TITLE: 1.50 Pitch Wafer 180° SMT	
GENERAL TOLERANCE		USE: CUSTOMER	PART NO.:
X. ±0.50	X. ±5°	APPD: Liuzhengling	A1507AWV-**-D1MA1-R-M
X.X ±0.30	X.X ±2°	CHKD: Steven	DWG NO.:
X.XX ±0.20	X.XX ±1°	DR: FangSongLe	JKUN-GCKH-0852
⊕	UNITS: mm	SCALE 1 : 1	SHEET 1 / 1

A

B

C

D

E

F