

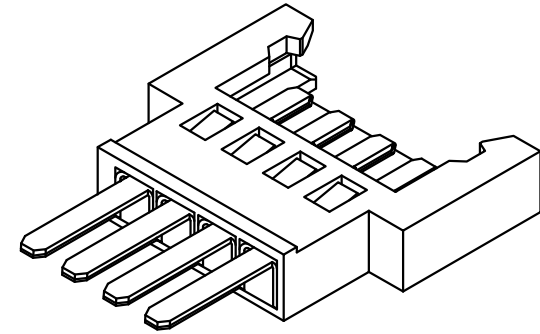
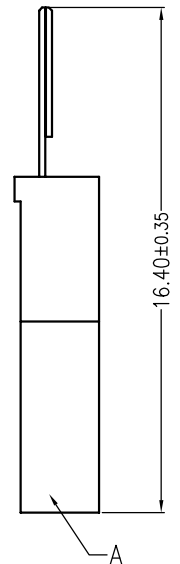




REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	蒋建银	2018.12.04

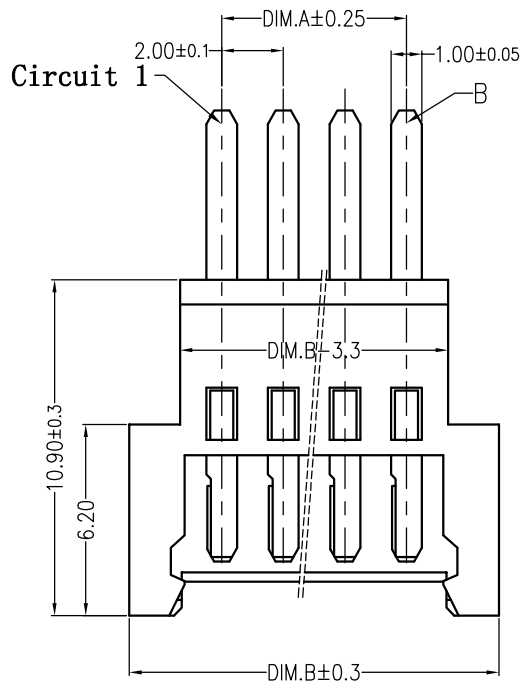

**主要技术参数 Main Specifications**

- 线数 (Poles): 02 to 16
- 接触电阻 (Contact resistance):  $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance):  $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 125V AC DC
- 额定电流 (Rated current): 2.0A AC DC
- 耐电压 (Withstand Voltage): 500V AC/minute
- 温度范围 (Temperature Range):  $-40^{\circ}C \sim +120^{\circ}C$

**ORDER INFORMATION:**

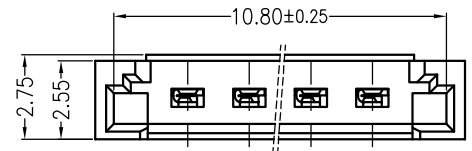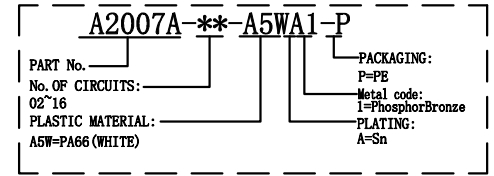

Circuits	Dimensions (mm)		
	A	B	C
02	2.00	8.00	6.80
03	4.00	10.00	8.80
04	6.00	12.00	10.80
05	8.00	14.00	12.80
06	10.00	16.00	14.80
07	12.00	18.00	16.80
08	14.00	20.00	18.80
09	16.00	22.00	20.80
10	18.00	24.00	22.80
11	20.00	26.00	24.80
12	22.00	28.00	26.80
13	24.00	30.00	28.80
14	26.00	32.00	30.80
15	28.00	34.00	32.80
16	30.00	36.00	34.80

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B	CONTACT	n PCS	PhosphorBronze	Sn-plated
A	PEDESTAL	1 PCS	PA66	COLOR:WHITE

<b>JKUN 温州健坤接插件有限公司</b> <b>WENZHOU JKUN CONNECTOR CO., LTD.</b>	X.±0.5	X.±5'	USE: CUSTOMER	TITLE: - 2.0mmPITCH 180°WAFER DIP TYPE
	.X±0.3	.X±2'		
	.XX±0.25	.XX±1'	APPD: 邵敬和	DWG NO.: JKUN-GCCP-0795
	--	--	CHKD: 田峰	SCALE: 1:1
		UNITS: mm	DR: 蒋建银	SHEET: 1 / 1